


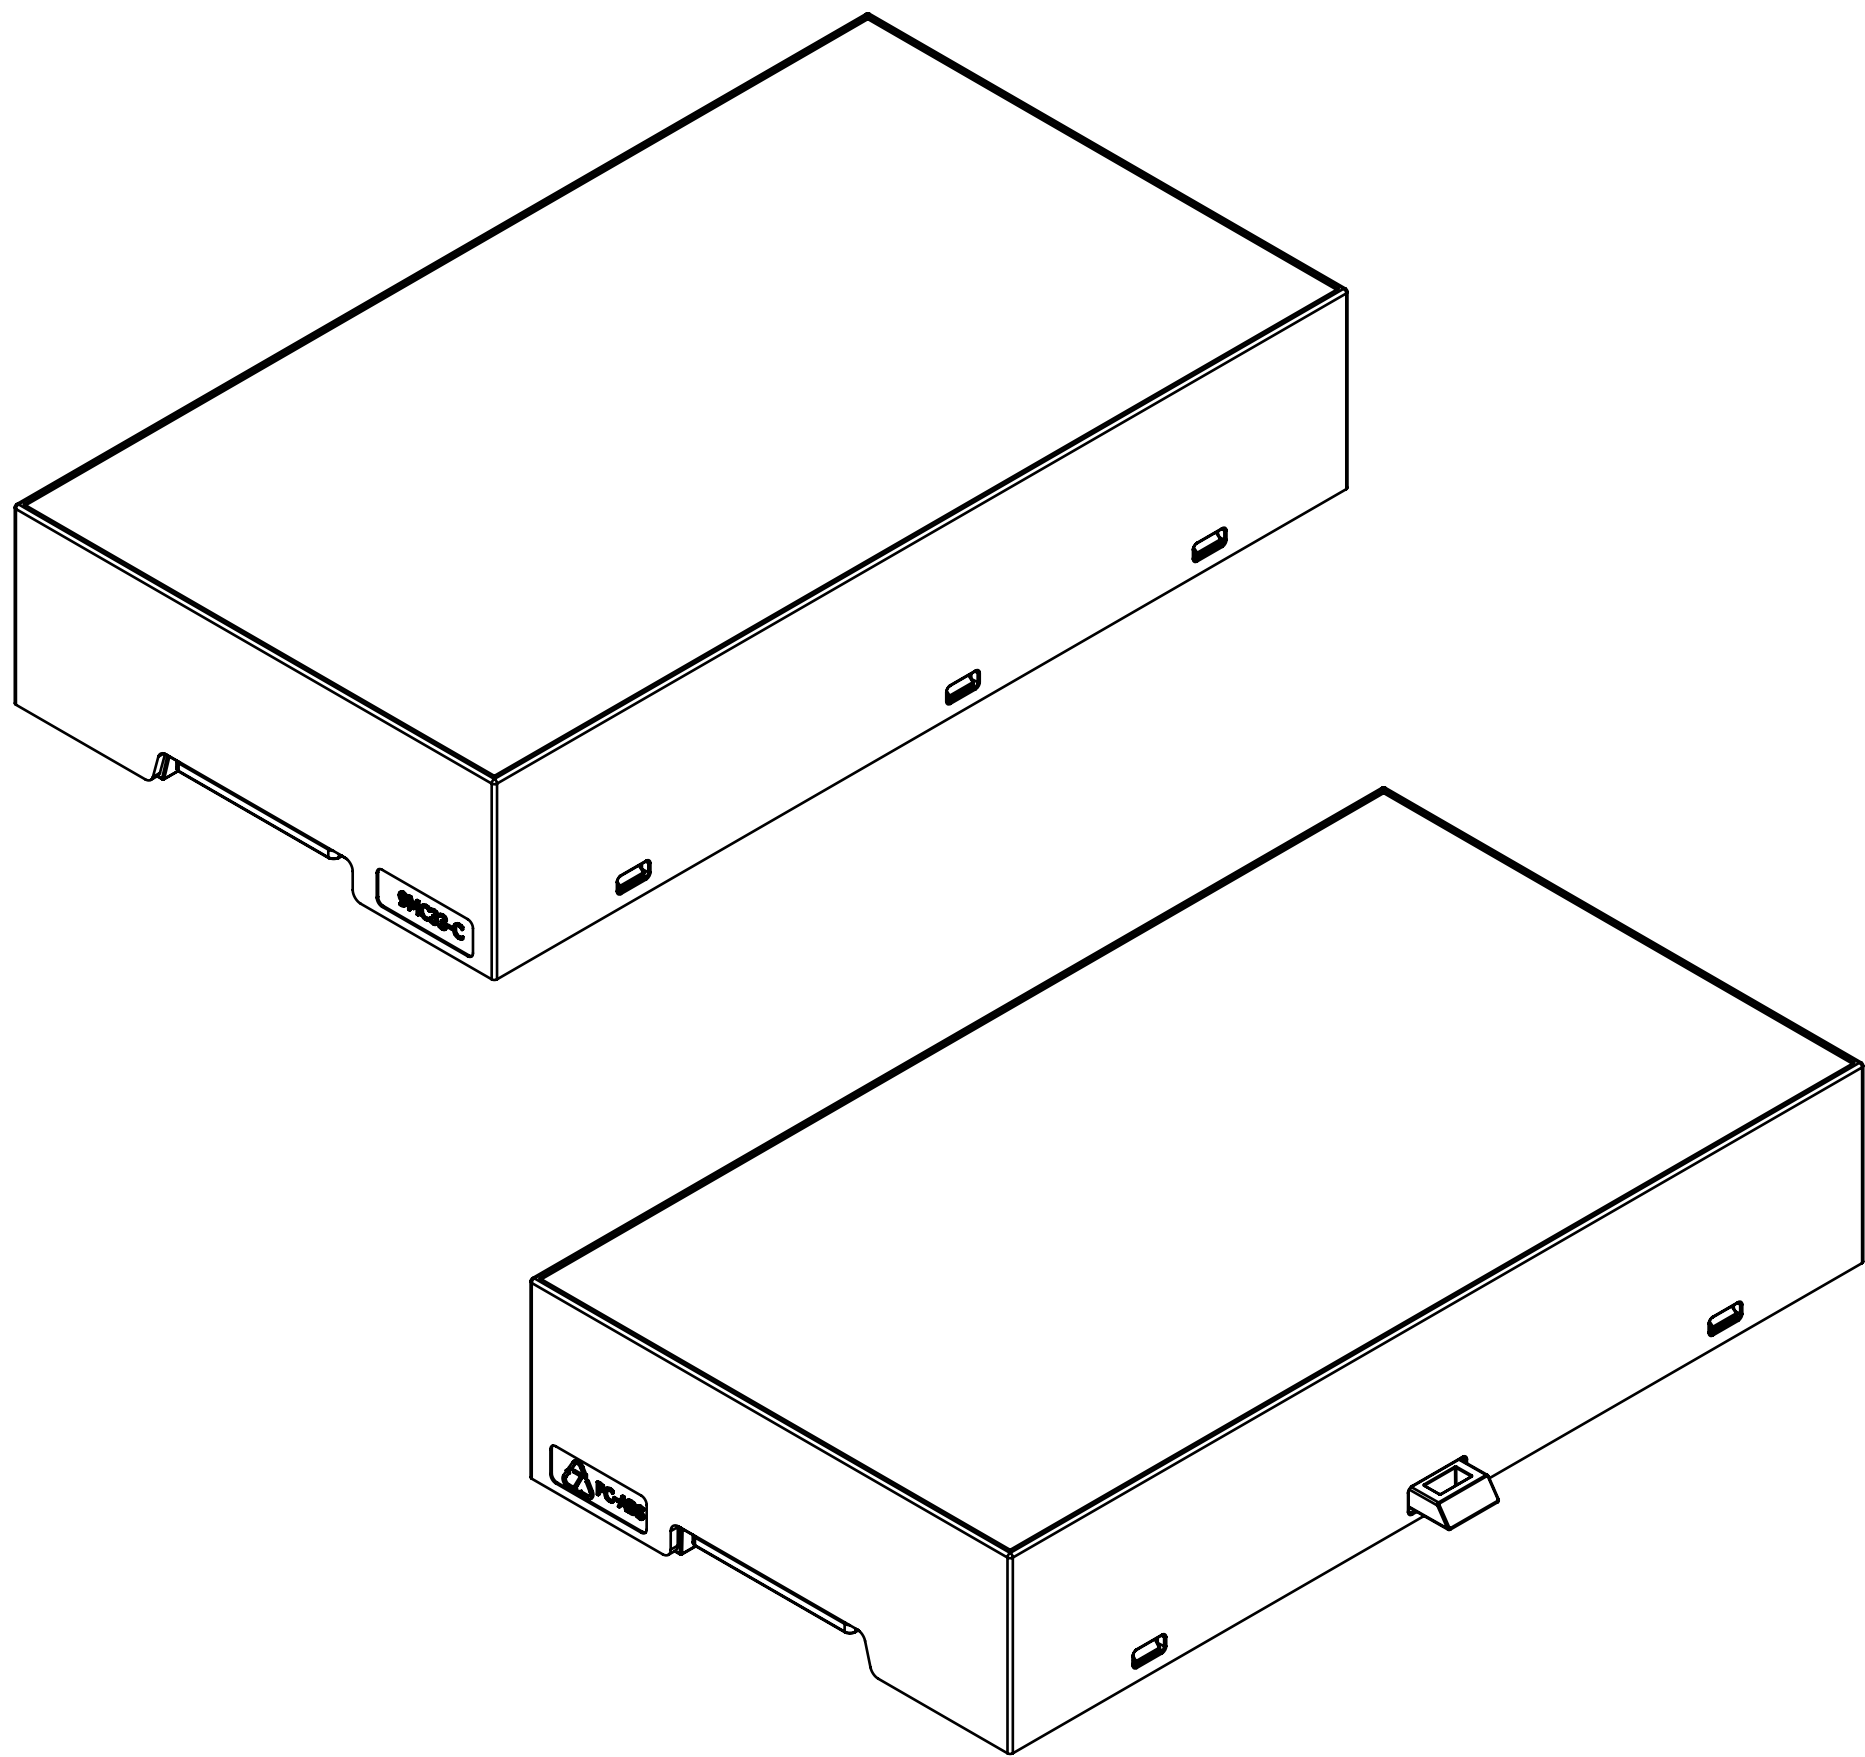
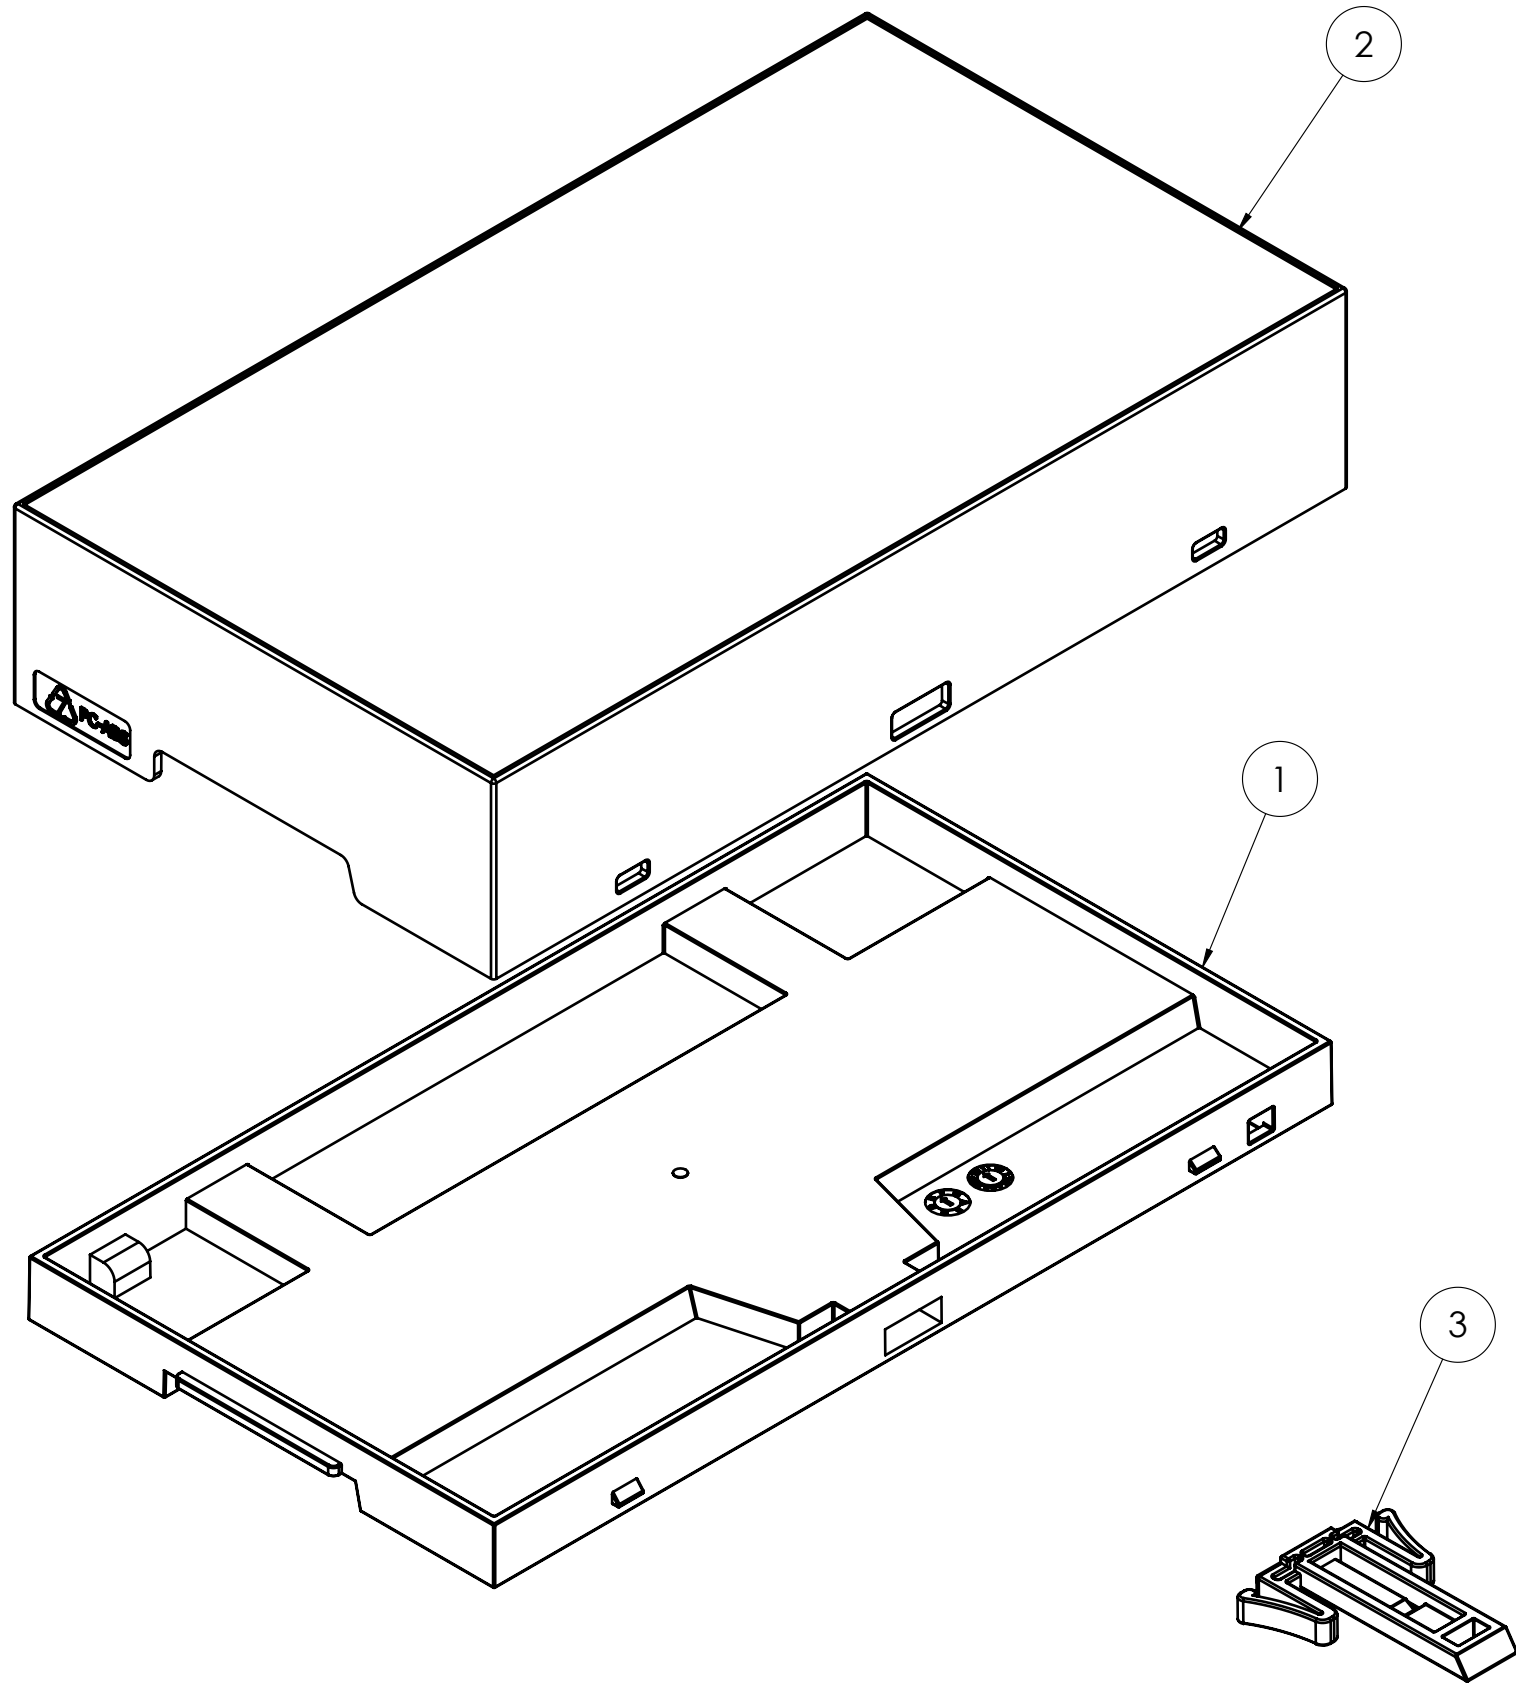
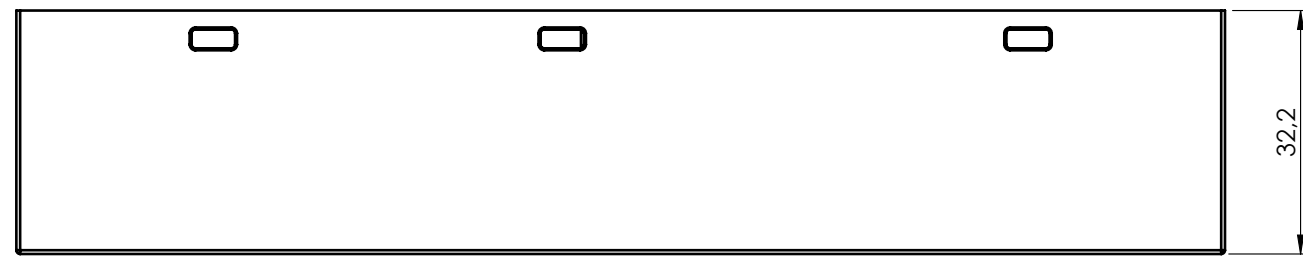
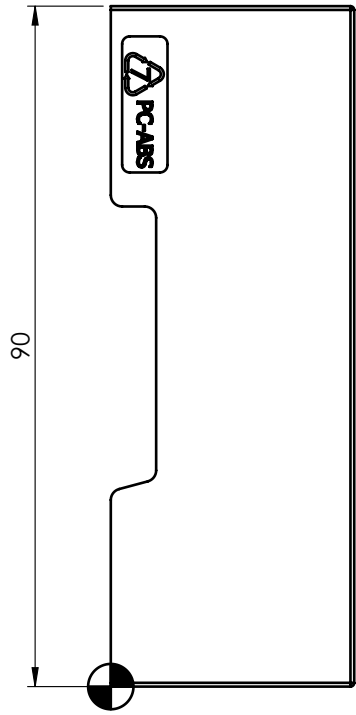

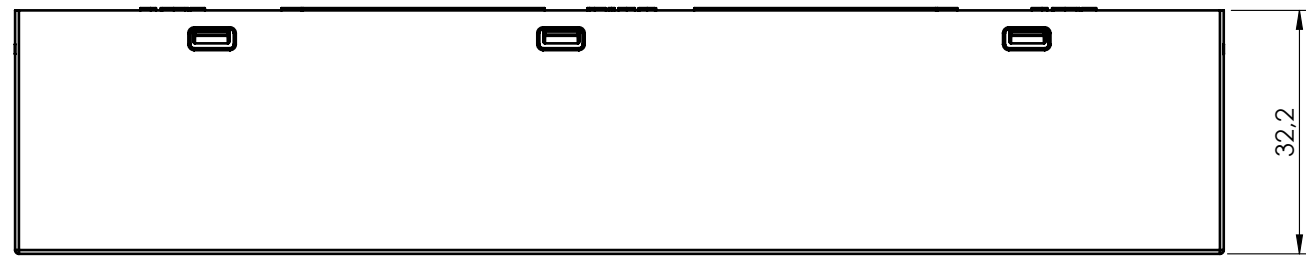
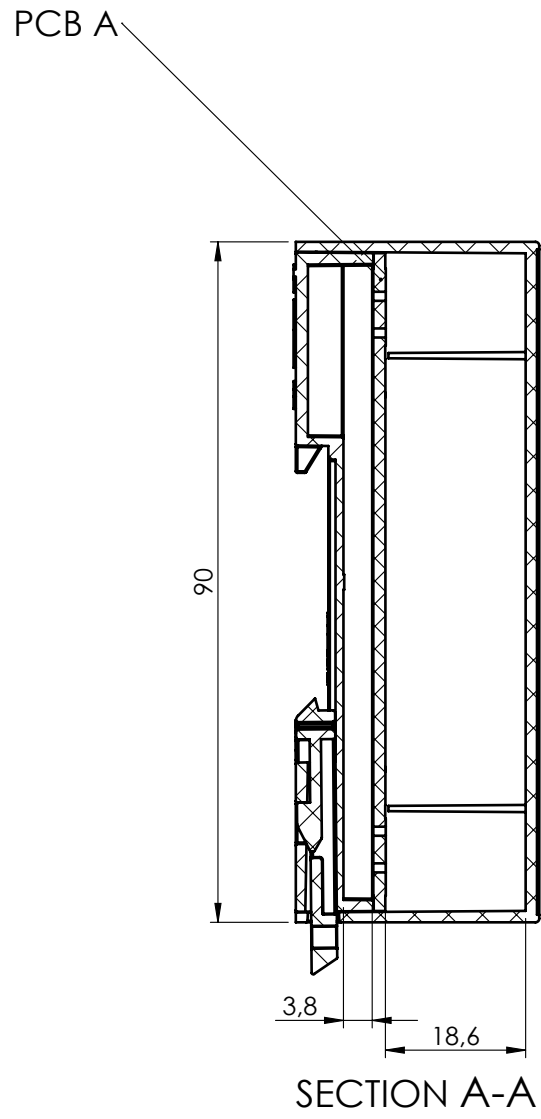
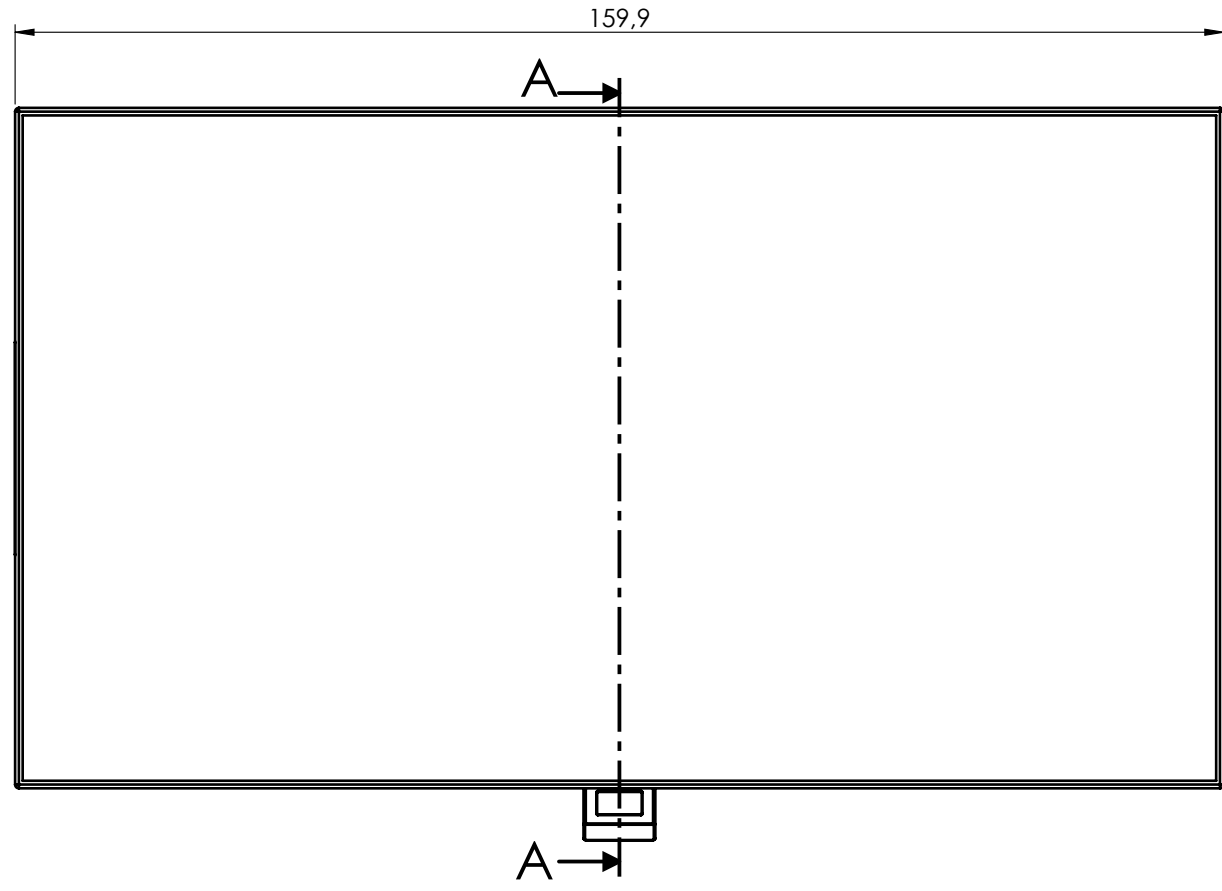
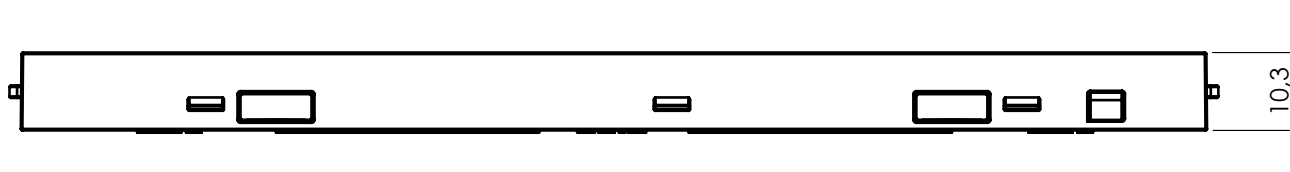
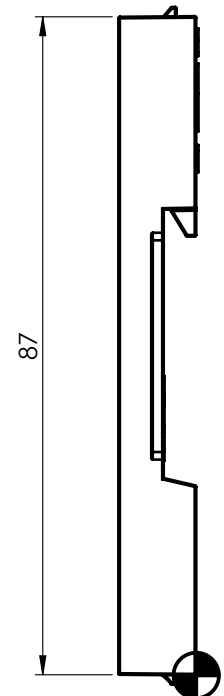
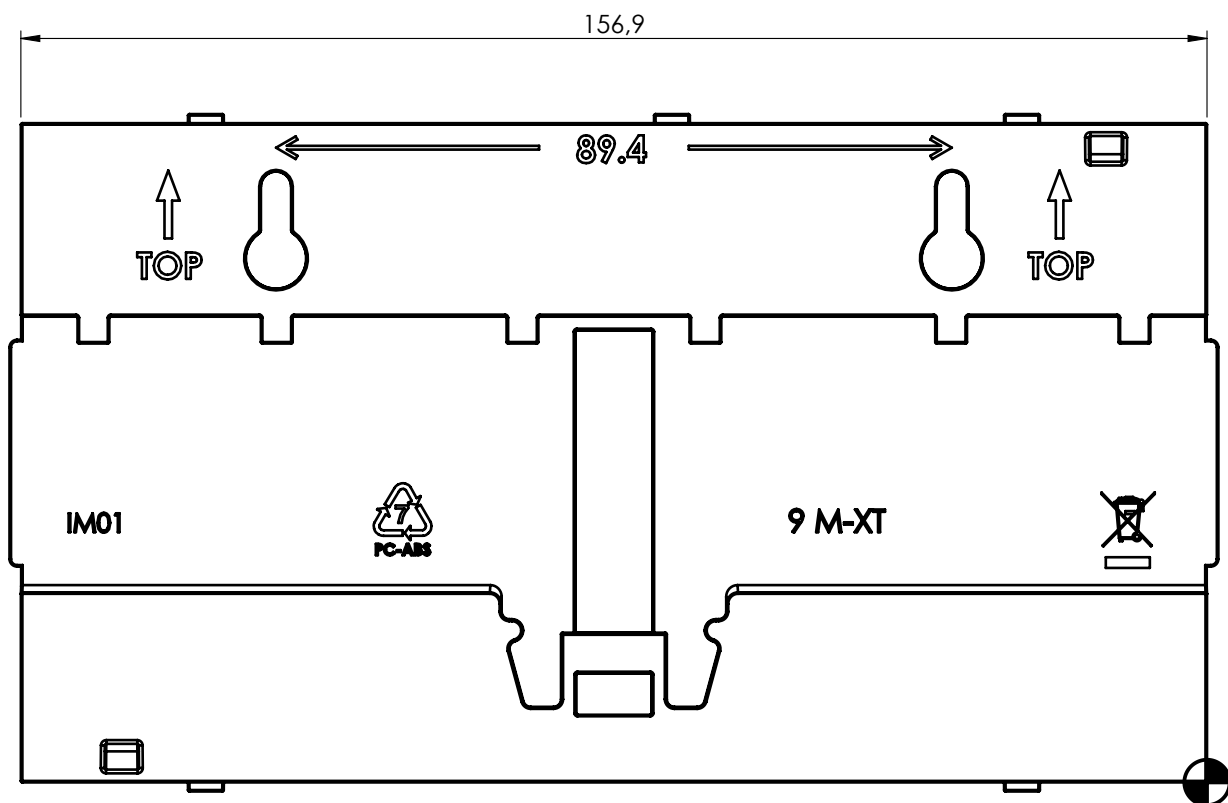


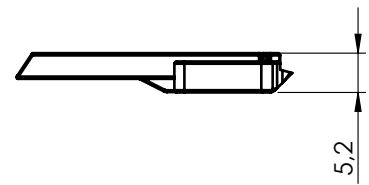

BASE



HOOK




General information:
• Workpiece zero point for mechanical processing
• Minimum recommended radius for machining = R1.0 mm
• Mounting rail like EN 60715: TH 35-7.5 or TH 35-15
• Recommended PCB outline on www.italtronic.com



RIF.	Q.TY	DRAWING	DESCRIPTION
1	1	2_250_00086	BASE 9M MODULBOX XT-XTS
2	1	2_250_00019	BODY MODULBOX XTS 9MC33-C CLOSED COMPACT
3	1	2_250_00072	HOOK FOR MODULBOX XT-XTS

General Tolerance UNI EN 22768/1 (Media [mm])						Sheet:
from 0.5 to 3	from 3 to 6	from 6 to 30	from 30 to 120	from 120 to 400		1
± 0.1	± 0.1	± 0.2	± 0.3	± 0.5		
Scale:	IM:	Drawn:	Checked:	Date:	Material:	Process:
1:1	--	M.S.	R.N.	14/03/2024		
Dimension in mm		Replaces the:		Derived from:	Weight:	Cod. Mold:
		M-05185-00		--	gr	--
Description:			CONTENITORE MODULBOX XTS 9MC33-C CHIUSO COMPACT			
ENCLOSURE MODULBOX XTS 9MC33-C CLOSED COMPACT			Drawing nr. 3_250_00019			
Rev.:			00 A1			

Max height of the terminal:
Modulbox XT1/XTS: 18.5 mm
Modulbox ONE: 20 mm

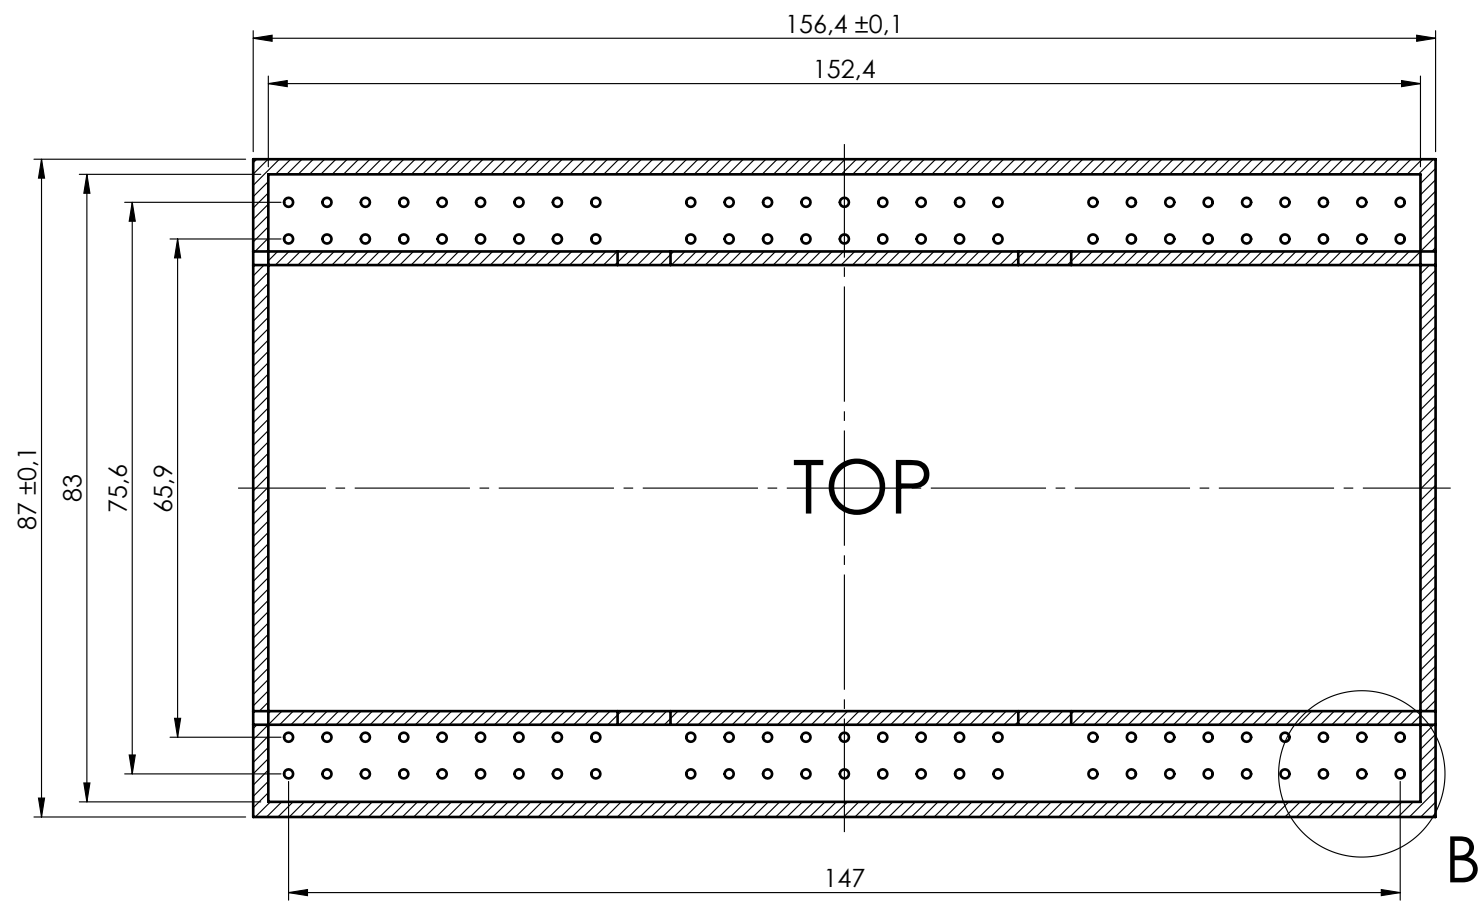

PCB A

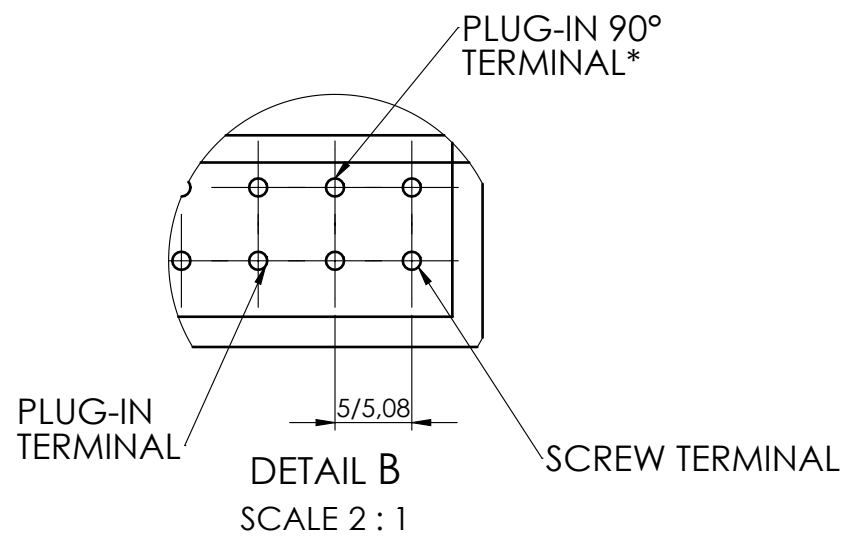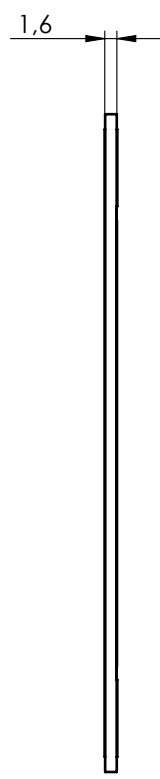

**To use the PLUG-IN terminals in Modulbox ONE use plug-in adapter P05000003E (5/5.08 pitch) and P05000004E (7.5/7.62 pitch)*

General Tolerance UNI EN 22768/1 Media [m]						Sheet:
from 0.5 to 3 ± 0.1	from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	PCB	
Scales: 1M:	Drawn:	Checked:	Date:	Material:	Process:	
1:1	--	M.S.	R.N.	14/03/2024		
Dimension in mm		Replaces the:		Derived from:	Weight:	
		M-05185-00		--	gr	
Description:						
CONTENITORE MODULBOX XT5 9MC33-C CHIUSO COMPACT						
ENCLOSURE MODULBOX XT5 9MC33-C CLOSED COMPACT						
Drawing nr. 3.250_00019						
					Rev.: 00	
2					01 A1	

NO COMPONENTS AREA