


4


3

2

1

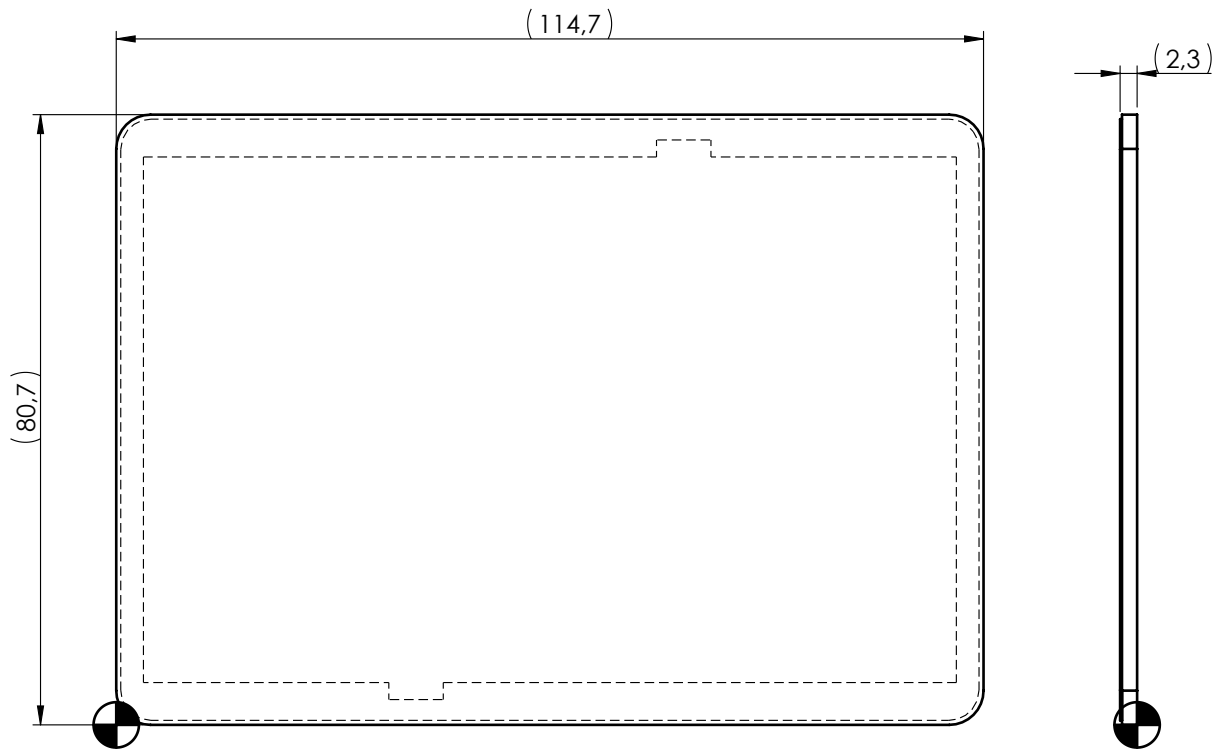



### Specifications

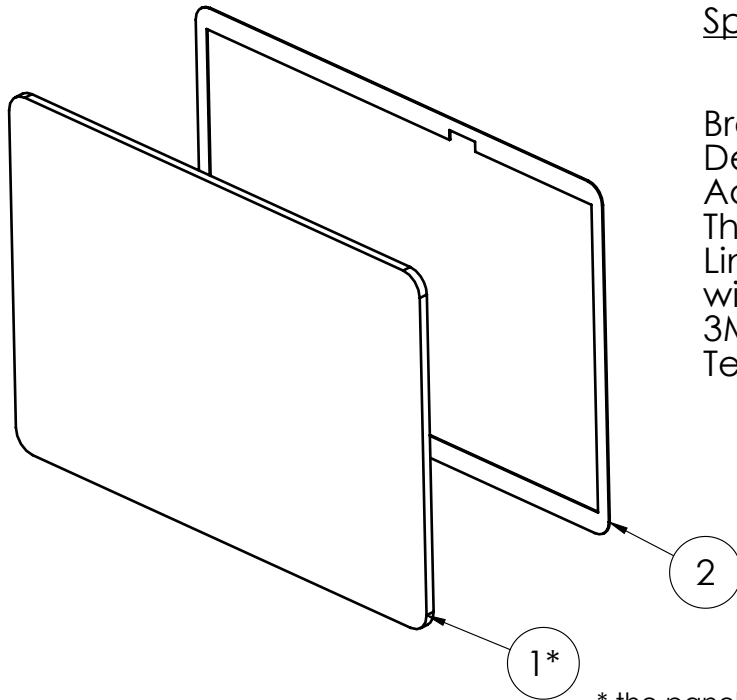


Brand: 3M  
Designation: VHB 9473 PC transparent  
Adhesive system: modified acrylic  
Thickness: 250 (without liner)  
Liner: Poly Coated Tan Paper white  
with brand name  
3M VHB green  
Temperature resistance: 150° C

BIADHESIVE NOT ASSEMBLED

\* the panel is not in self-stimulant material

RIF.	Q.TY	DRAWING	DESCRIPTION		
1*	1	2_010_00053	FRONT PANEL ITOUCH		
2	1	2_010_00054	ITOUCH FRAME ADHESIVE		
General Tolerance UNI EN 22768/1 Media (m)					Sheet:
from 0.5 to 3 ± 0.1	from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	1
Scale: 1:1	Drawed: R.N.	Checked: R.N.	Date: 20/03/2023	Material:	Process:
 Dimension in mm	Derived from: --			Weight: gr	Cod. Mold: --
 enclosures for electronics italtronic.com			Description: KIT PANNELLO FRONTALE ITOUCH C/BIADESIVO KIT FRONT PANEL ITOUCH WITH ADESIVE		
Drawing nr.: <b>3_010_00024</b>				Rev.: 00	A4

#### General information:

-  Workpiece zero point for mechanical processing
- Minimum recommended radius for machining = R1.0 mm

4

3

2

1